


Overview

Millimeter wave right angle adapter cable assembly with 2.92mmK, 2.4mm and 1.85mmV connectors, keeping the cable section the smallest as possible.

Features

The electric characteristic is the same as straight adapter series.

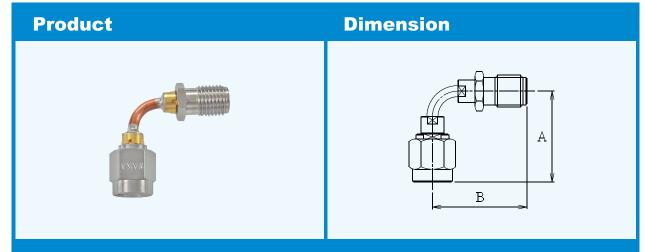

Product Series

Product	Item Code	Α	В
2.92mmK/P-2.92mmK/J	02YD294-00	(18)	(18.8)
2.4mm/P-2.4mm/J	02YD295-00	(19)	(20)
1.85mmV/P-1.85mmV/J	02YD296-00	(18)	(20.4)

Application

Perfect for the Millimeter wave probe with vertical connectors. Keeping the cable section, the smallest as possible, the micro scope can go lower for more accurate measurement.







Data

◆02YD294-00 (2.92mmK/P-2.92mmK/J) Tr1 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div ►Tr2 S11 Refl LogM RefLvl: 0 dB Res: 10 dB/Div 30 20 1 10 0 -10 3 -20 -30 -40 -50 -60 -70 Ch1 TR Start 40 MHz Stop 40 GHz | IFBW 1 kHz Avg OFF leasuring State Ch1 Tr1 S21 > M1: 40 GHz - 0.1695 dB Ch1 Tr2 S11 M1: 4.44 GHz -25.8657 dB Ch1 Tr2 S11 M2: 25.16 GHz-25.5073 dB Ch1 Tr2 S11 > M3: 38.56 GHz - 20.2706 dB

